

Fig 1(a)

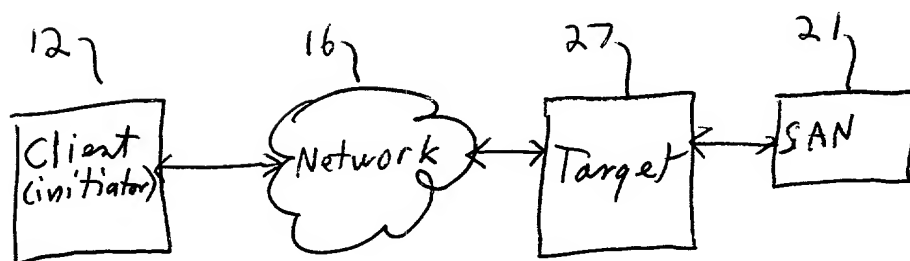


Fig 1(b)

112} Client Computer (Initiator)

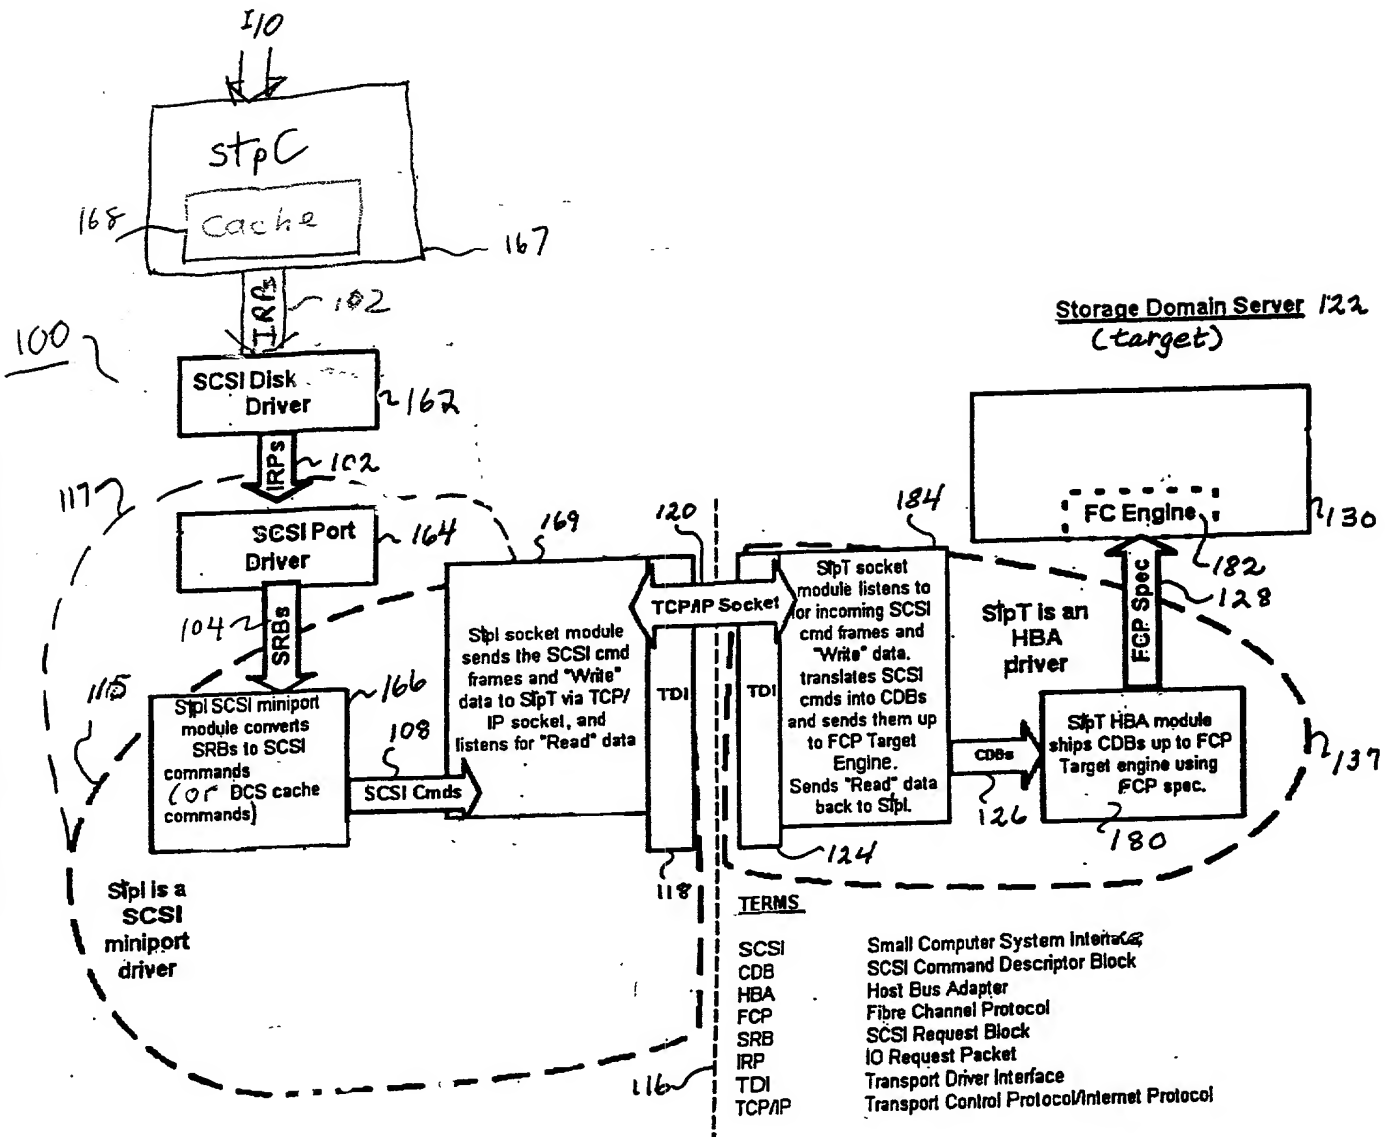


FIG. 2(a)

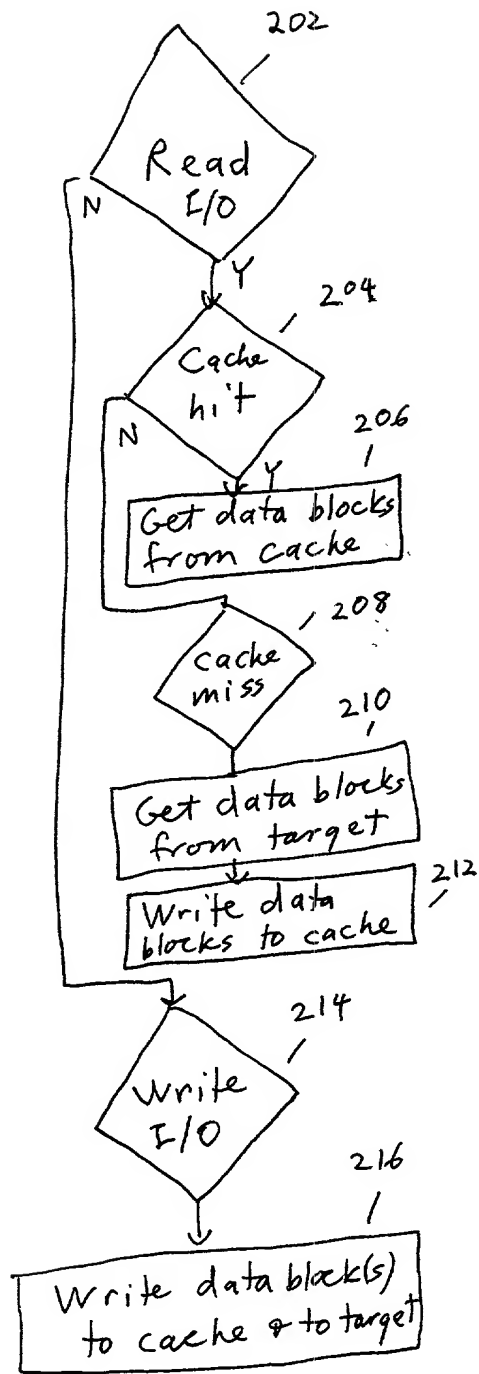


Fig 2(b)

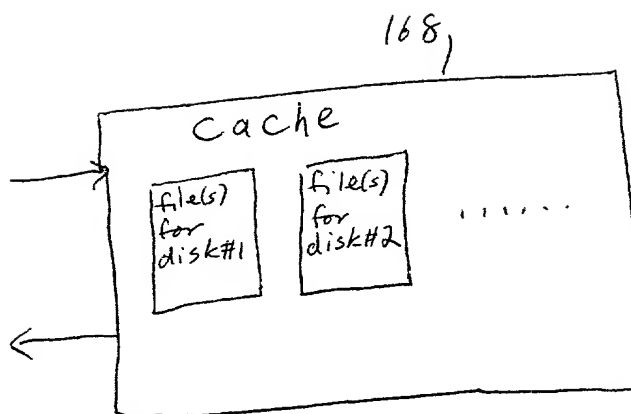


Fig. 2(c)

Read Command

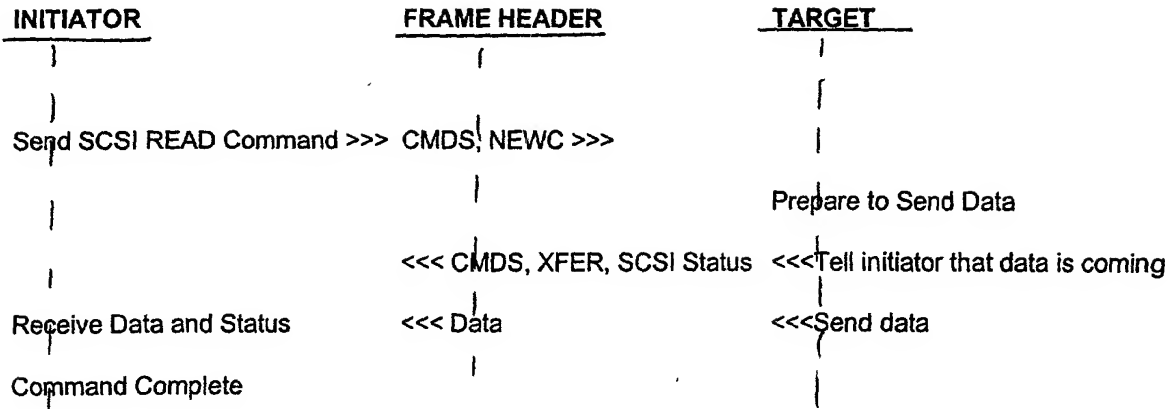


Fig. 3(a)

Write Command

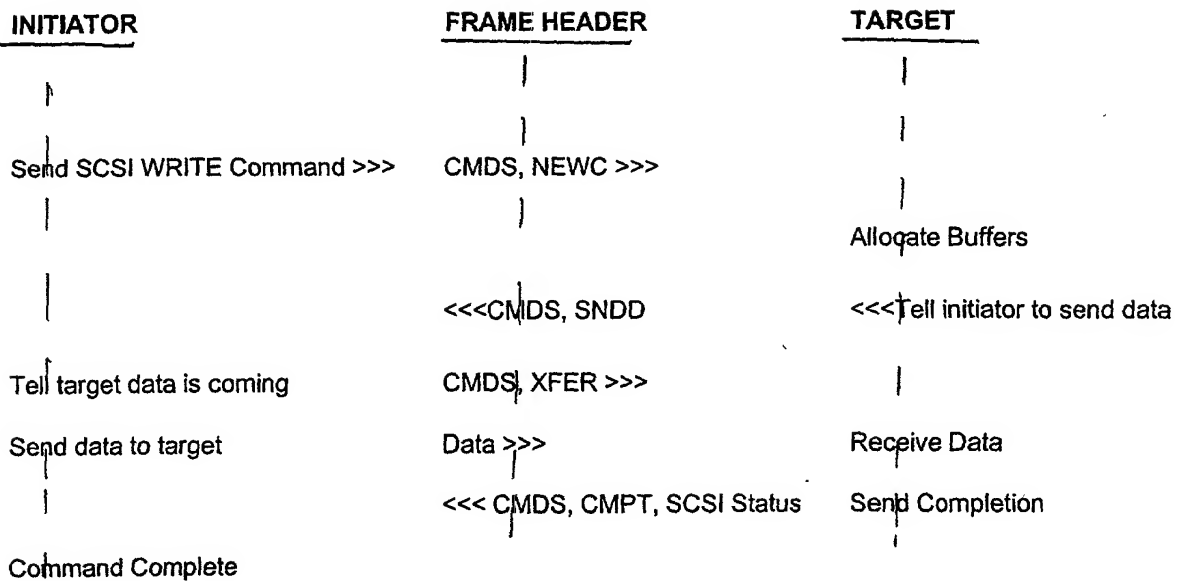


Fig. 3(b)

SpI
"SCSI over IP/initiator"

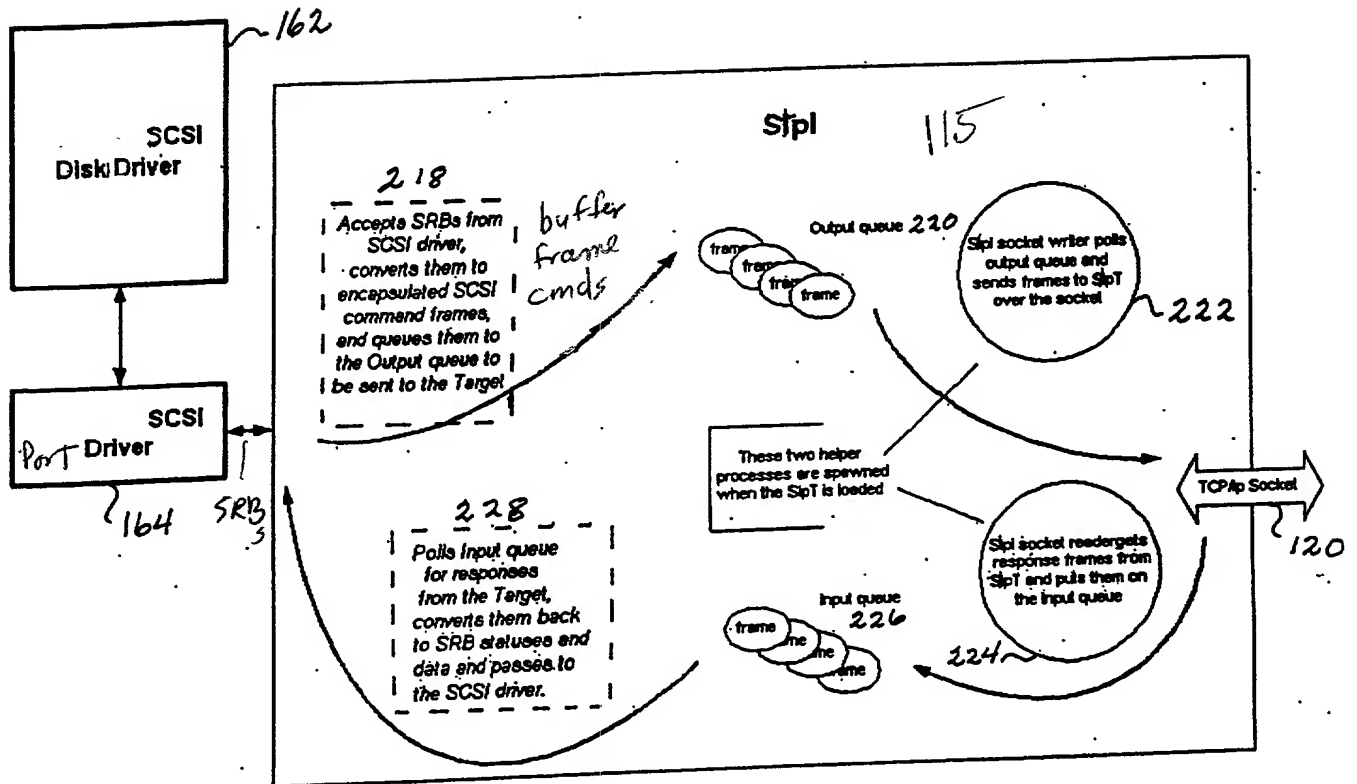


FIG. 4

StpT **"SCSI over IP/Target"**

This driver runs on the DCS
 Storage Domain Server

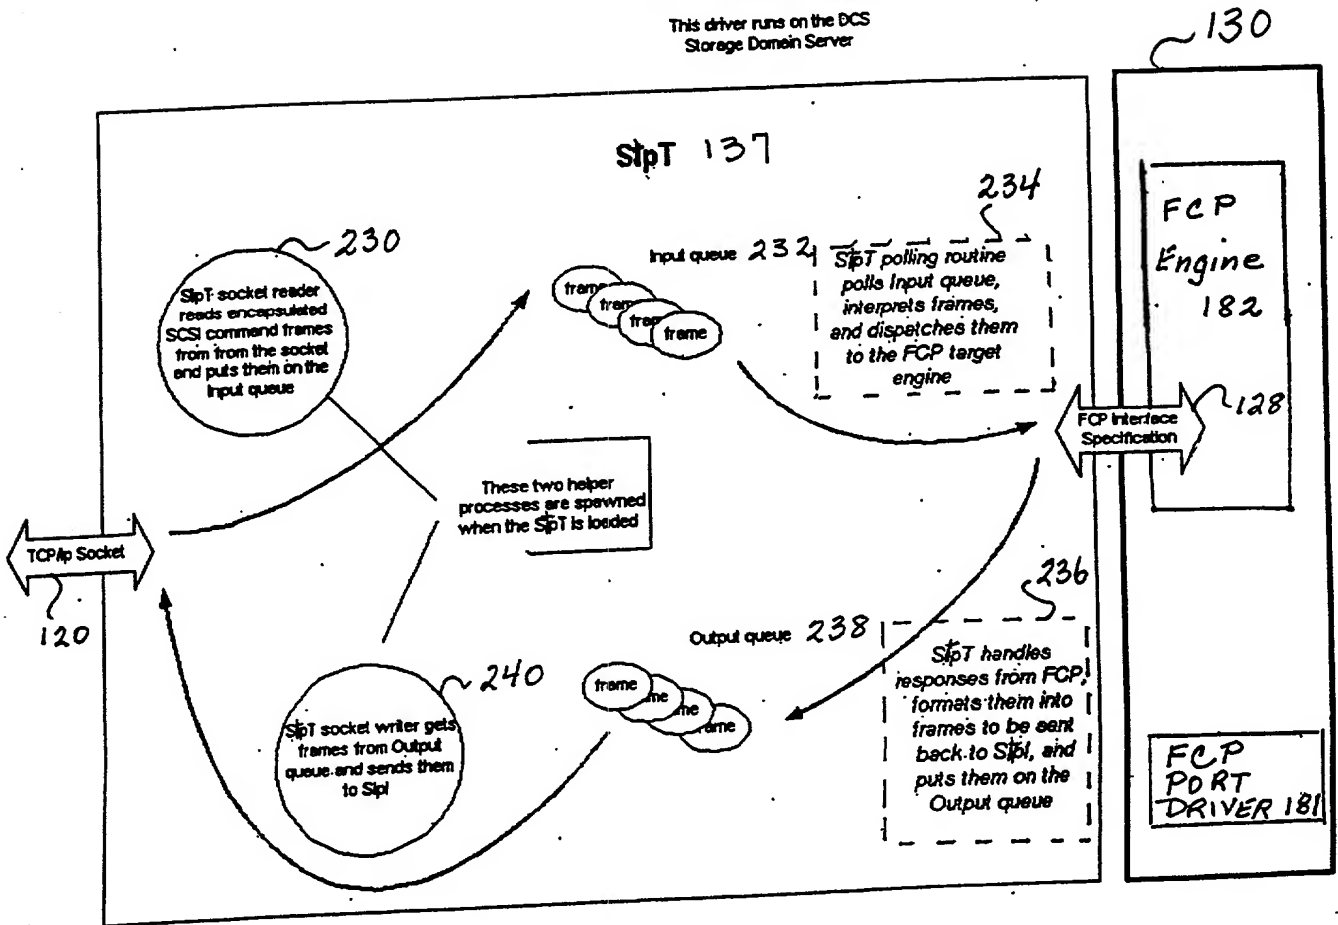


FIG. 5

Byte	0	1	2	3
0	Frame Sync Number			
4	Sequence Number			
8	Type			
12	Event			
16	Lun		Status	Flags
20	Originator Exchange ID			
24	Responder Exchange ID			
28	Originator Buffer			
32				
36				
40				
44	Responder Buffer			
48				
52				
56				
60	Transfer Length			
64	Frame Sync Number			

Fig. 6
Frame header format